

220W




COLOR CODE	SP
PART NUMBER	GRW-120-220-SP-S-C
ORDER CODE	70-1004
PERFORMANCE	
WATTS (MAX)	220
PPF	548
PPE	2.6
POWER INPUT	100~277VAC 50/60Hz
COLOR RANGE (nm)	380-780
UV	YES
FAR RED	YES
SPECTRUM BOOSTER	N/A
FACTORY DEFAULT RATIO	6:1
BEST RATIO RANGE	1:1~10:1
CONTROLS	
DIMMING	YES
CONTROL BOX	YES
APP	YES
BLUETOOTH®	NO
WIFI	YES
LYNX3™	NO
SMARTUNE™	NO
PHYSICAL STATS	
COOLING	PASSIVE, FANLESS COOLING
DIMENSIONS	1240mm x 140mm x 76 mm (48.4" x 5.5" x 3.0")
WEIGHT	8 kg (15 lbs)
IP RATING	IP66
CERTIFICATIONS	
UL	YES
DLC	YES
WARRANTY	5 YEARS
RATED LIFETIME	L70 50,000 Hours

The BenchLight™ SP (Sunlight PRO) model is designed to mimic the visible PAR and invisible UV and far red range of the sun. Suitable for applications from 1-foot to 4-foot installations. This model is designed to produce the full color profile of ePAR.

Full control of the color ratio and intensity, through the Grow3™ Controller. Each color channel is fully adjustable with the controller and APP technology. The SP model is designed for best operation between 1:1 to 10:1 ratios while maintaining a steady PPE.



COLOR RATIO EXAMPLE

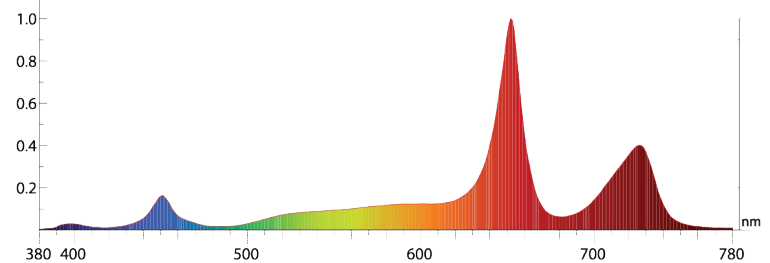

EXAMPLE: DEFAULT COLOR RATIO 6:1 AT 100% ILLUMINANCE WITH UV AND FAR RED

INCLUDED WITH LIGHT FIXTURE



74-1001 - POWER CABLE, 1.5M



75-1002 - HANGING KIT, 2M (2PCS)

OPTIONAL ACCESSORIES*



72-1001 - GROW3, CONTROLLER



74-1002 - 0.5M SIGNAL CABLE

*Most common accessories shown, contact LED Smart for full list of available accessories.