

## 320W




**LYNX3™** **SmartTune™**

RE	
<b>PART NUMBER</b>	<b>GRW-120-48-320-RE-S-C</b>
<b>ORDER CODE</b>	<b>70-1026</b>
<b>PERFORMANCE</b>	
WATTS (MAX)	320
PPF (μmol/s)	1073
PPE (μmol/J)	3.1
POWER INPUT	100~277VAC 50/60Hz
COLOR RANGE (nm)	400-700
UV	NO
FAR RED	NO
SPECTRUM BOOSTER	RED
FACTORY DEFAULT RATIO	3:1
BEST RATIO RANGE	1:1~10:1
<b>CONTROLS</b>	
DIMMING	YES
CONTROL BOX	YES
APP	YES
BLUETOOTH®	YES
WIFI	YES
LYNX3™	YES
SMARTTUNE™	YES
<b>PHYSICAL STATS</b>	
COOLING	PASSIVE, FANLESS COOLING
DIMENSIONS	1240mm x 140mm x 76mm (48.4" x 5.5" x 3.0")
WEIGHT	6.8 kg (15 lbs)
IP RATING	IP66
<b>CERTIFICATIONS</b>	
UL	PENDING
DLC	PENDING
WARRANTY	5 YEARS
RATED LIFETIME	L70 50,000 Hours


The TopLight™ RE (Red Enhanced) model is designed with ultra enhanced red spectrum, for top light installations, up to 14-feet, with large footprint area. Acts as a 1 to 1 replacement for 1000W HPS lights. With the added features such as color ratio adjustment, dimming and wireless controls.

Producing a PPE up to 3.34 μmol/J. Saves at least 60% energy consumption compared to 1000W HPS.

Save more energy when used with LYNX3™ and SmartTune™ controls.

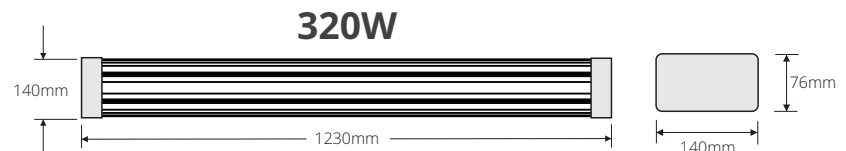


### COLOR RATIO EXAMPLE

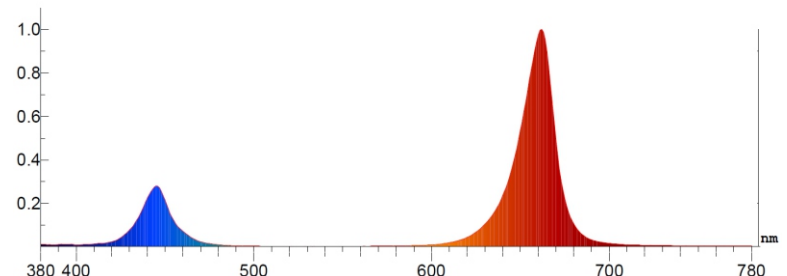

EXAMPLE: COLOR RATIO WITH DEFAULT 0.68:1 AT 100% ILLUMINANCE

### COMPLIMENTARY COLOR RANGE

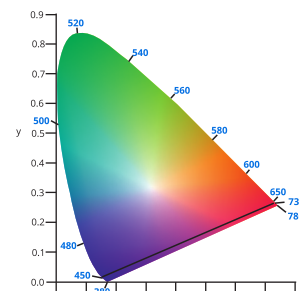

### ACCESSORIES INCLUDED



74-1022 - POWER CABLE, 1.5M (4.92")



75-1002 - HANGING KIT, 2M (2PCS)