

300W




COLOR CODE	HS
PART NUMBER	GRW-120-48-230-HS-S-C
ORDER CODE	70-1014
PERFORMANCE	
WATTS (MAX)	230
PPF (μmol/s)	580
PPE (μmol/J)	2.75
POWER INPUT	100~277VAC 50/60Hz
COLOR RANGE (nm)	400-700
UV	NO
FAR RED	NO
SPECTRUM BOOSTER	RED
FACTORY DEFAULT RATIO	3.6:1
BEST RATIO RANGE	2:1~10:1
CONTROLS	
DIMMING, MANUAL	YES
DIMMING, FADE TO OFF	YES
WIRELESS RADIO	YES
BLUETOOTH®	YES
WIFI	YES
LYNX3™	YES
SMARTTUNE™	YES
PHYSICAL STATS	
COOLING	PASSIVE, FANLESS COOLING
DIMENSIONS	1240mm x 140mm x 76 mm (48.4" x 5.5" x 3.0")
WEIGHT	6.35 kg (14 lbs)
IP RATING	IP66
CERTIFICATIONS	
UL	YES
DLC	YES
WARRANTY	5 YEARS
RATED LIFETIME	L70 50,000 Hours


The TopLight™ HS model is designed as an replacement for HPS lights. For the growers that are looking to use the consistent light profile that they are familiar with in an HPS light.

The HS model is most efficient between 2:1 to 10:1 ratios.

Save more energy when used with LYNX3™ and SmartTune™ controls.

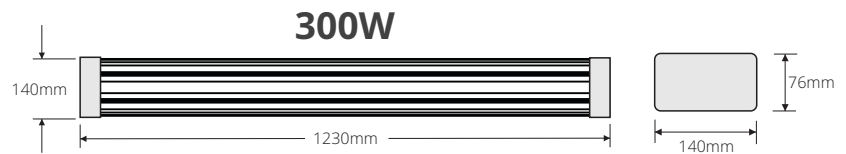


COLOR RATIO EXAMPLE

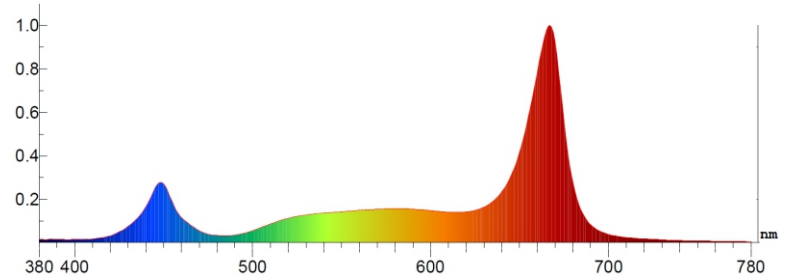

EXAMPLE COLOR RATIO WITH DEFAULT 6:1 AT 100% ILLUMINANCE

COMPLIMENTARY COLOR RANGE



OPTIONAL ACCESSORIES



74-1022 - POWER CABLE, 1.5M (4.92")

75-1002 - HANGING KIT, 2M (2PCS)